


Pre-Assembled 4' Strip Door Clip with 6-12" overlapping strips

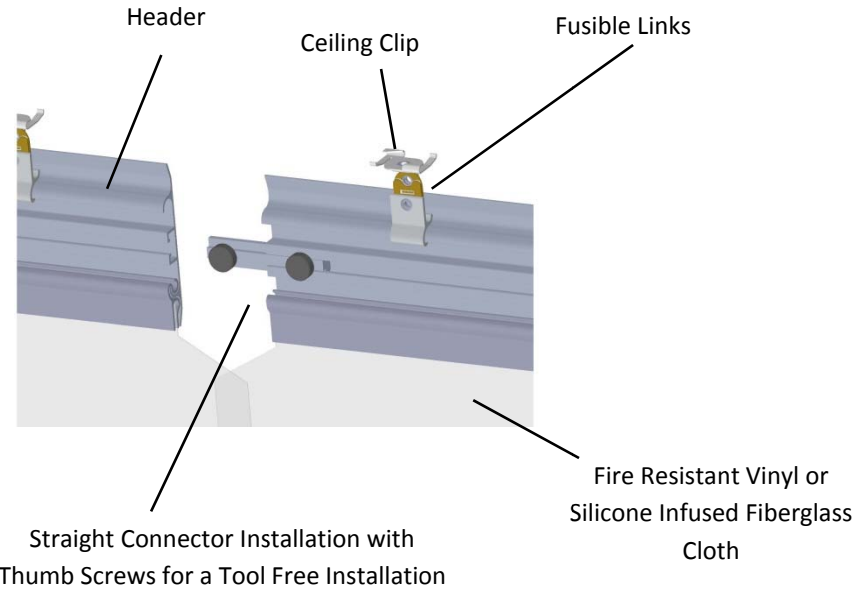

SPECIFICATIONS

General Information

- Modular, Field Installation
- UL Listed Fusible Links
- 360 Degree Ceiling Hung Attachment
- Overlapping Design for improved Air Sealing
- Slide and lock to install adjacent headers
- Easy Pivot and Grip Installation method for partitions allows for any location any time installation or adjustment.
- Standard Header Length: 4'

OPTIONS

Aluminum Extrusion Finish Options

- Clear Anodized
- Black Anodized

System Lengths

- 0"-96"
- 96"-144"
- 144"-192"

Partition Material

- Fire Resistant, Static Dissipating Clear Vinyl
- Silicone Infused Translucent Fiberglass Cloth

INCLUDED COMPONENTS

- 1 x 4' Long Header Rail
- 1 x Straight Connector w/ Color Matching Thumb Screws
- 2 x Ceiling Grid Connector
- 1 x 4' Long Curtain Rock and Lock Bracket

ADDITIONAL SPECIFICATIONS


- Vinyl meets requirements of 2009 NFPA, UL94 V-0, CPAI-84, NFPA-701, 1,000 hours U.V. ASTM Weatherometer
- Silicone Infused Fiberglass Cloth meets requirements for 2013 NFPA 75, ASTM E84-12. Rated Class 'A'
- Fusible link is UL Listed
- Mechanically activated under thermal stress at 135°F to release system and not interfere with fire suppression systems.
- Fusible link maximum Loading of 45 lbs
- Ceiling Clip designed for standard 1" wide T-Grid System, may not be compatible with all systems.




Pivot and Grip Curtain and Ceiling Link Connections



Modular installation for Any Aisle Length

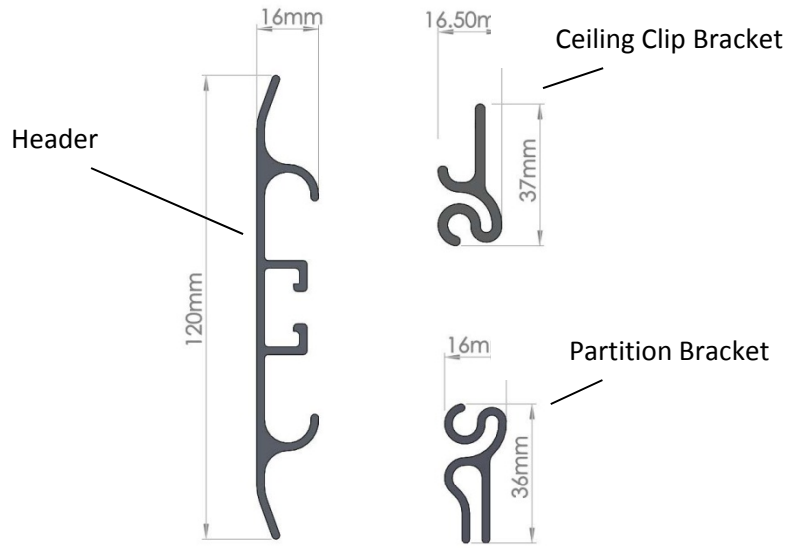

Custom Extrusion Profiles

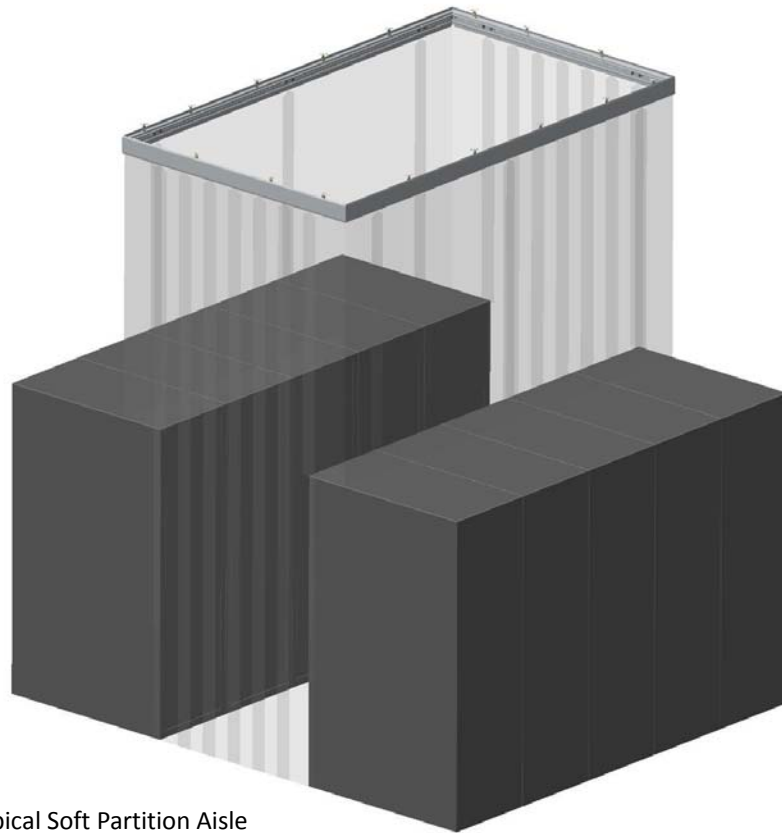

Typical Soft Partition Aisle Containment Layout

PART NUMBERS

