

## SPECIFICATIONS

### General information

- 25% open area.
- 24 inches square all steel construction.
- Concentrated load rating up to 800 lbs.
- Available with or without galvanized slide damper.
- Protected from corrosion by an epoxy paint finish.
- Class A flame spread rating.
- Non-combustible material.

## UNDERSTRUCTURE OPTIONS

- 2' Bolted Stringer       4' Bolted Stringer

## COVERING OPTIONS

Tile factory laminated with top set trim edge

- 1/16" HPL \_\_\_\_\_ (Color) \_\_\_\_\_
- 1/16" Conductive HPL \_\_\_\_\_ (Color) \_\_\_\_\_
- 1/8" HPL \_\_\_\_\_ (Color) \_\_\_\_\_
- 1/8" Conductive Vinyl \_\_\_\_\_ (Color) \_\_\_\_\_
- 1/8" Static Dissipative Vinyl \_\_\_\_\_ (Color) \_\_\_\_\_

Tile factory laminated with integral trim edge

- 1/8" HPL \_\_\_\_\_ (Color) \_\_\_\_\_
- 1/16" HPL \_\_\_\_\_ (Color) \_\_\_\_\_
- 1/16" Conductive HPL \_\_\_\_\_ (Color) \_\_\_\_\_
- .040" HPL \_\_\_\_\_ (Color) \_\_\_\_\_
- (.040" HPL available in Formica only)

Static Pressure (In. H <sub>2</sub> O)	Air Volume (CFM)	Air Volume w/ damper open (CFM)	Air Volume w/ damper closed (CFM)	Air Volume w/ damper 1/2 open (CFM)
0.02	332	237	26	140
0.04	476	328	39	199
0.05	532	366	44	221
0.06	584	402	49	242
0.08	666	461	57	282
0.10	746	515	64	314
0.12	818	582	71	344
0.14	886	620	75	370
0.16	944	669	80	396
0.18	990	699	84	415
0.20	1050	756	88	438


FULL HARD COLD ROLLED STEEL TOP SHEET

EPOXY PAINT FINISH INSIDE & OUT


DRAW QUALITY STEEL BOTTOM PAN

HOT DIPPED GALVANIZED DAMPER

DAMPER ADJUSTS FROM TOP WITH ALLEN WRENCH

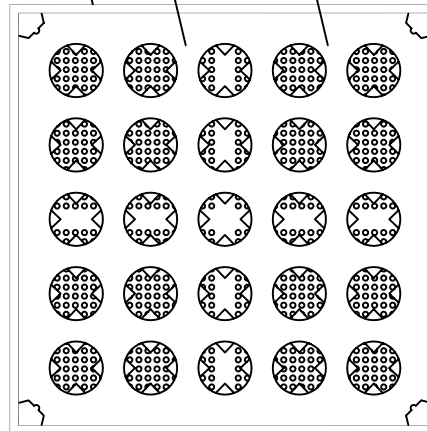

**BOTTOM VIEW**

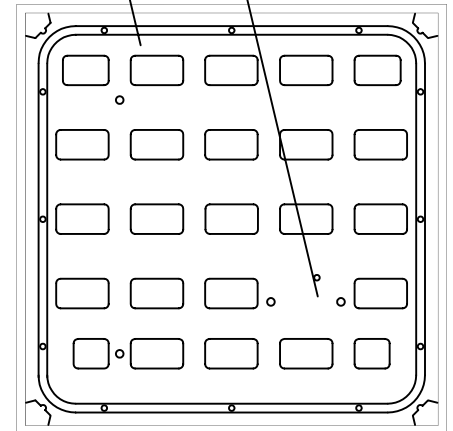

**BOTTOM VIEW WITH DAMPER**